










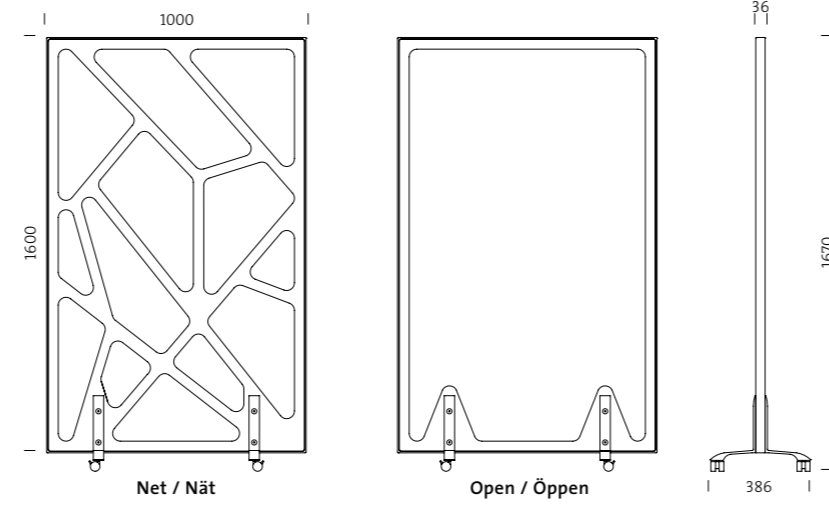



WEBB

Technical information




Frame / Ram Pattern / Mönster

		Birch / Björk
		NCS S 0502-Y
		NCS S 9000-N
		NCS S 3560-Y80R
		NCS S 2070-Y30R

Filling / Fyllning
Dark gray felt / Mörkgrå filt

Tested according to SS-EN ISO 354 for sound absorbing.
Evaluated according to SS-EN ISO 11654.

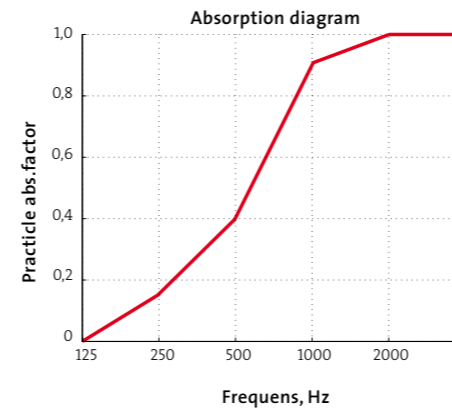

Activt material: 2 x 10mm felt 1,5kg/m² (polyester)
on 10mm MDF-board

glimakra.

Glimakra Akvamatik AB
Box 125, SE-280 64 Glimåkra, Sweden. Tel +46 (0)44 454 10. Fax +46 (0)44 454 11.
Export: Tel +46 (0)44 454 20. Fax +46 (0)44 454 21.

Showrooms
Glimåkra: Tel +46 (0)44 454 10 • Stockholm Studio B3: Tel +46 (0)8 2142 31.
Göteborg Studio L6: Tel +46 (0)31 13 83 90 • Oslo K. Mæhlum A/S: Tel +47 221 286 30.
info@glimakra.com www.glimakra.com



WEBB
Design Nils Gulin SIR/MSA, MFA

glimakra.

