


## Sound absorption factor

Wobedo - Squarebubbles och Woolbubbles - Dikt

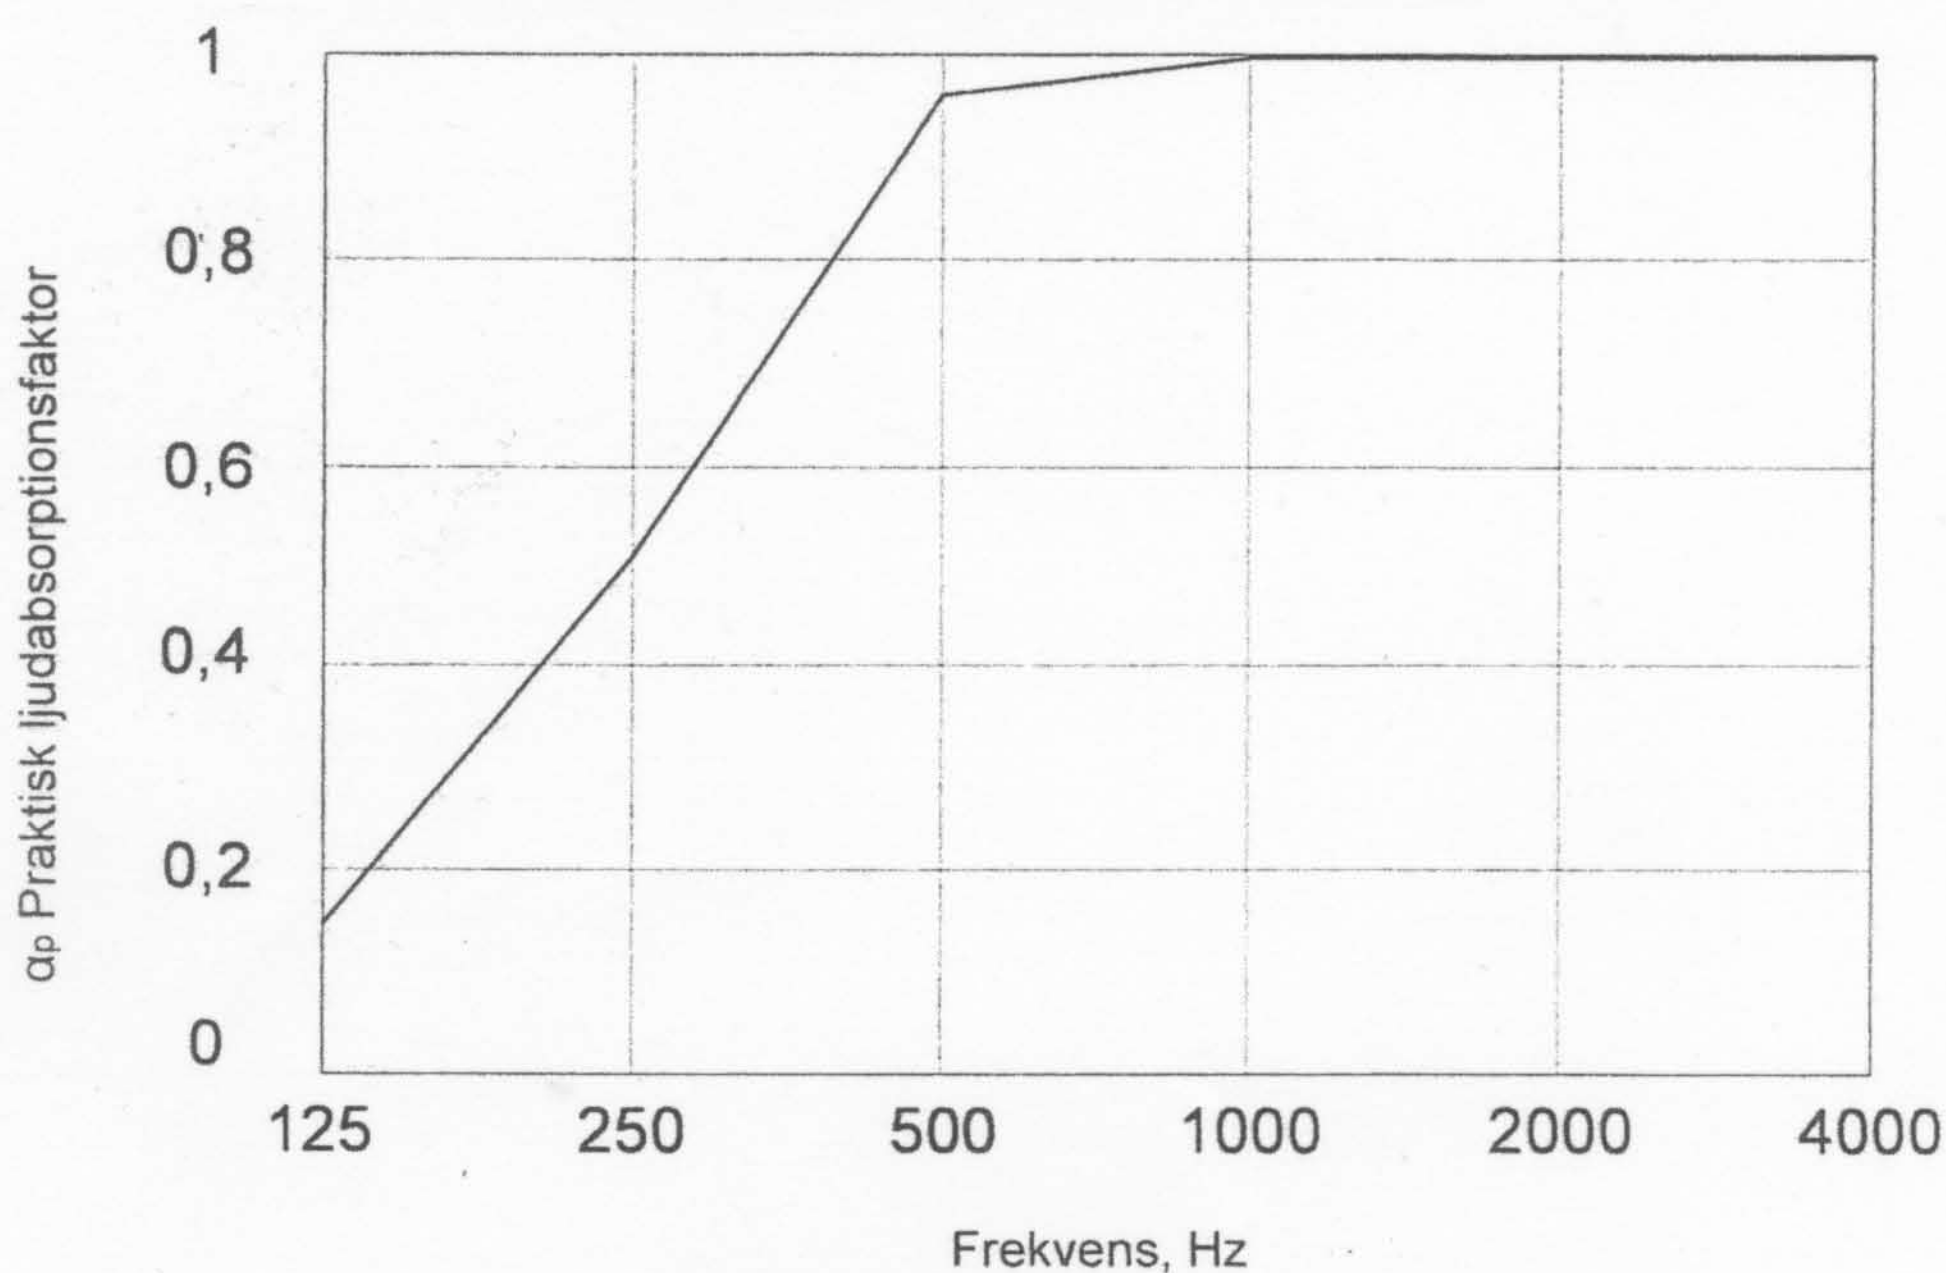

125	250	500	1000	2000	4000	Hz	Soundabsorption factor
0,15	0,5	0,95	1	1	1		

Wallmounted: absorption classification B (according to EU standards)

### Explanation:

The products have the highest possible measured sound absorption coefficient at the middle- and high frequencies, i.e. between 500-4000Hz.

Sound absorption is classified in A-E, and since the classification is made on the whole spectrum of frequencies, the total classification is B.

Testmethods: SS-EN ISO 354  
SS-EN ISO 11654